

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):


- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification:</b> <b>A61B 3/14</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 89/08423</b> <b>(43) International Publication Date:</b> 21 September 1989 (21.09.89)
<b>(21) International Application Number:</b> PCT/US88/02359 <b>(22) International Filing Date:</b> 15 July 1988 (15.07.88) <b>(31) Priority Application Number:</b> 166,055 <b>(32) Priority Date:</b> 9 March 1988 (09.03.88) <b>(33) Priority Country:</b> US  <b>(71)(72) Applicants and Inventors:</b> SCHNEIDER, Michael, B. [US/US]; 630 S. Hermitage, #408, Chicago, IL 60612 (US). LLOYD, Stephen, R. [US/US]; 5642 North Bernard, Chicago, IL 60659 (US).  <b>(74) Agent:</b> VAN SANTEN, James; Hill, Van Santen, Steadman & Simpson, 70th Floor, Sears Tower, Chicago, IL 60606 (US).		<b>(81) Designated States:</b> AT (European patent), AU, BB, BE (European patent), BG, BJ (OAPI patent), BR, CF (OAPI patent), CG (OAPI patent), CH (European patent), CM (OAPI patent), DE (European patent), DK, FI, FR (European patent), GA (OAPI patent), GB (European patent), HU, IT (European patent), JP, KP, KR, LK, LU (European patent), MC, MG, ML (OAPI patent), MR (OAPI patent), MW, NL (European patent), NO, RO, SD, SE (European patent), SN (OAPI patent), SU, TD (OAPI patent), TG (OAPI patent).  <b>Published</b> <i>With international search report.</i> <i>With amended claims.</i>

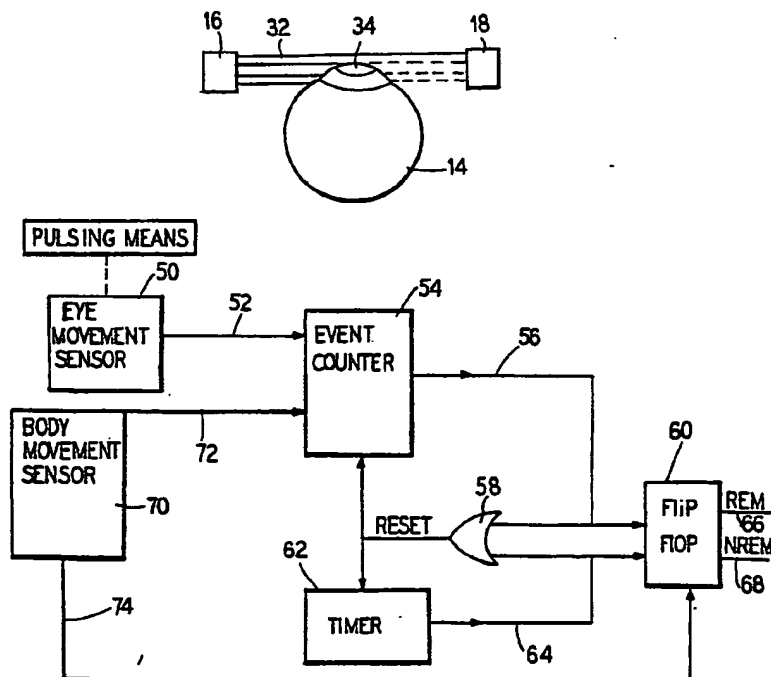**(54) Title: RAPID EYE MOVEMENT SLEEP STATE DETECTOR****(57) Abstract**

A method and apparatus are provided in which an REM sleep state is accurately identified by detecting and counting a selectable time interval. A body movement sensor (70) is used to prevent false indications of REM sleep by inhibiting such indication upon sensing of body movement. An eye movement sensor (50) which uses IR light transmission (32) across an eye (34) is disclosed.

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	ML	Mali
AU	Australia	GA	Gabon	MR	Mauritania
BB	Barbados	GB	United Kingdom	MW	Malawi
BE	Belgium	HU	Hungary	NL	Netherlands
BG	Bulgaria	IT	Italy	NO	Norway
BJ	Benin	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland				

S P E C I F I C A T I O N

## RAPID EYE MOVEMENT SLEEP STATE DETECTOR

The instant invention pertains generally to eye movement sensing and more particularly to a method and an apparatus for detecting a rapid eye movement sleep state.

It is highly desirable to be able to accurately detect the presence of a rapid eye movement (REM) sleep state. Such detection is valuable for dream analysis, psychotherapy and other medical research.

A variety of methods and apparatus have been designed and applied in an attempt to accurately detect the presence of a rapid eye movement sleep state. An example is disclosed by R. Harper et al., in a publication entitled "A New Technique for Long-Term Recording of Eye Movements in Infants", Vol. 40, No. 1 Electroencephalography and Clinical Neurophysiology, pp. 109-112 (Jan. 1976). In the article, Harper et al. disclose a disk-shaped eye piece which is taped over an eye, such as that of an infant, and which includes a gallium arsenide infrared-emitting diode and a silicon phototransistor mounted side by side to sense movement of one eye during sleep. The diode emits an IR beam which is reflected off of the eye lid or eye surface to the phototransistor. Both the diode and the phototransistor occupy a 0.5 cm<sup>3</sup> package. The device, which senses eye movements of either an open or closed eye, provides an output signal which is recorded on a chart recorder. The chart recorder is visually monitored to determine the presence of REM sleep.

In R. Helford, et al., "REM/NREM Discrimination via Ocular and Limb Movement Monitoring: Correlation with Polygraphic Data and Development of a REM State Algorithm," Psychophysiology, Vol. 23, No. 3, May 1986, pages 334-339, is disclosed a study involving

piezoelectric transducers attached to the body in addition to eye movement sensors during sleep assessment. Movements were recorded on a polygraph and an algorithm is described generally for differentiating REM and non-REM periods.

In T. Okuma, et al. "Dream Detector and Automatization of REMP-Awakening Technique for the Study of Dreaming," Psychophysiology, Vol. 7, No. 3, Nov. 1970, pages 508-515, is disclosed a device having electrodes for application to the face of a subject for dream detection. A block diagram in Figure 1 shows the signal processing steps for the electrode output signals which leads to awakening of the subjects after a number of eye movements. The number of accumulated eye movements over a preset level were the only criteria used in dream detection.

M. Cronin, et al. disclose a system for detecting REM sleep in an article entitled "A Multichannel Hybrid System for Rapid Eye Movement Detection", 23rd A CEMB, Washington, D.C. (Nov. 15-19, 1970). In the system, electrodes are applied to an outer canthus or corner, of an eye. Electrical signals received thereby are filtered to retrieve signals corresponding to eye movements occurring over a period of from about 0.33 to 1.0 second. A threshold criterion is applied to each eye channel to record eye movements greater than a minimum amplitude. A digital output of the system is fed to a computer.

It would be an improvement in the art to provide a simple and inexpensive method and apparatus for automatically detecting and identifying REM sleep with a high degree of accuracy.

The instant invention provides a simple and inexpensive device for automatically distinguishing REM sleep with a high degree of accuracy. Moreover, the

instant invention inhibits false REM sleep .  
identifications by detecting other physical  
characteristics which indicate that a person is not in  
REM sleep.

5           In the instant invention, individual eye movements  
that are detected by an eye movement sensor are counted  
by a counter. Preferably, only eye movements greater  
than a predetermined amplitude are counted. A timer  
10           connected to the counter times for a predetermined  
interval. If a predetermined number of eye movements  
are counted before expiration of the predetermined time  
interval, a determination is made that a person is in  
REM sleep, and accordingly, a signal is sent to an  
15           indicator for indicating the presence of REM sleep. If  
the predetermined time interval expires before the  
predetermined number of eye movements are counted, a  
determination is made that a person is in non-REM  
sleep, and a signal is sent to an indicator for  
20           indicating the presence for non-REM sleep. As soon as  
a determination of type of sleep is made, whether by  
expiration of the predetermined time interval, or by  
the eye movement counter counting the predetermined  
number of eye movements, both the eye movement counter  
and the timer are reset to zero and a new counting and  
25           timing cycle for redetermination of the presence of REM  
or non-REM sleep begins immediately.

          In a further development, the invention may  
include a body movement sensor which, upon detecting  
gross body movement, inhibits the apparatus from  
30           indicating REM sleep for a predetermined period of  
time.

          The eye movement sensor may be of any suitable  
type. However, it is preferable that the eye movement  
sensor use an infrared (IR) beam emitter and receiver  
35           to emit and receive, respectively, an infrared light

beam on opposite sides of a cornea or anterior of an eyeball such that said infrared light beam is occluded whenever the cornea moves into its path upon movement of the eyeball.

5       It is therefore an object of the invention to provide a method and an apparatus for detecting a rapid eye movement sleep state which is simple and economical and yet highly accurate. It is an aspect of the invention that eye movements are counted within a  
10       predetermined time period and that a count of such eye movements within said time period greater than a preselected value indicates a rapid eye movement sleep state.

15       These objects and aspects will become apparent by reference to the description of the preferred embodiments and the attached drawings.

#### ON THE DRAWINGS

20       Figure 1 is a front view of a person wearing an infrared emitting and sensing apparatus according to principles of the present invention for sensing eye movement;

25       Figure 2 is a diagrammatic representation in horizontal cross-section of the infrared eye movement sensor of Figure 1 showing an infrared light beam being transmitted across and partially interrupted by an eye;

      Figure 3 is a diagrammatic cross-section of the sensor of Figure 1 in which the eyeball is shown in a position such that the infrared light beam is not broken by the eye;

30       Figure 4 is a functional block diagram of an REM state detection device embodying principles of the instant invention and including the eye movement sensor of Figure 1; and

Figure 5 is a circuit diagram of one embodiment of the device of Figure 4 constructed according to principles of the invention.

Figure 6 is a circuit diagram of one embodiment of  
5 REM/NREM state output indicator.

In Figure 1, an eye movement sensor 10 is worn on the face of a subject 12 for detecting movements of an eye 14 of the subject 12. The sensor 10 includes an infrared light beam emitter 16 and an infrared light  
10 beam receiver 18 mounted in a frame 20. The emitter 16 and receiver 18 emit and receive, respectively, an infrared light beam across the front of the eye 14. The frame 20 includes a cross-member 22 with downwardly depending fingers 24, 26 and 28. The fingers 24 and 26  
15 extend downward on opposite sides of a nose of the subject 12 to support the frame 20 and maintain it in position on the subject 12 relative to the eye 14. The emitter 16 and receiver 18 are secured facing each other on the fingers 26 and 28, respectively, at  
20 opposite sides of the eye 14. A band 30 fixed to either side of the frame 20 encircles the subject's head and secures the sensor 10 in place.

As shown in Figure 2, an infrared light beam 32 is transmitted by the emitter 16 toward the receiver 18.  
25 When the sensor 10 is in the position shown in Figure 1, the beam 32 is transmitted across the front of the eye 14. Whether the lid of the eye 14 is open or closed, a protruding anterior portion 34 of the eyeball 14 protrudes into the light beam 32 thereby causing the  
30 sensor 10 to perceive the extent to which the beam 32 is blocked. The protruding anterior portion 34 of the eye 14 is, of course, the cornea of the eye 14. When the eye 14 is open, the cornea 34 itself blocks a portion of the beam 32. However, since the present  
35 invention is intended to measure sleep states, the lid



of the eye 14 will generally be closed and the cornea 34 will make the characteristic protrusion of the eyelid. For purposes of the present invention, all references hereinafter to the cornea or protruding anterior portion 34 are deemed to cover both the cornea of the open eye, as well as the protrusion of the lid caused by the cornea of the closed eye.

As shown in Figure 3, movement of the eye 14 in its socket results in a change of the extent to which the beam 32 is blocked by the cornea 34. In Figure 3, blockage of the beam 32 is completely eliminated by the extreme rotation of the eye 14 shown. While such extreme rotation may seldom occur, it can be appreciated that nearly any movement of the eye 14 will result in a detectable variation in the intensity of the beam 32 reaching the receiver 18. This results in corresponding variations in the electrical signal at the output of the receiver 18.

If it is desired to decrease the exposure to the eye of infrared emissions, for example, for safety or other reasons, the beam 32 can either be decreased in intensity or can be pulsed so that the average power transmitted across the eye is less. Such pulsing of the beam 32 can be accomplished by any known beam pulsing means.

While a preferred eye sensor has been described for use with the invention, a variety of other sensors may be used, such as those which detect reflection of infrared light from an eye or those which use piezoelectric, electro-ocular, mechanical, or other sensors.

In Figure 4 there is shown a diagram including fundamental aspects of the invention. In the invention, an eye movement sensor 50, which may be the above-described sensor unit 10, senses eye movement and

sends a representative signal along a path 52 to an event counter 54. Preferably, the eye movement sensor 50 emits a pulse signal, wherein each pulse represents a single movement of an eyeball. The event counter 54  
5 then maintains a running total of the pulses emitted by the eye movement sensor 50.

When the running total in the event counter 54 is high enough, the event counter 54 will emit a signal over path 56 to reset circuitry 58 and to REM sleep  
10 indicating circuitry 60. Simultaneously, a timer circuit 62 times for a preselected time interval. At the end of each interval, a signal is emitted by the timing circuit 62 over path 64 to both the reset circuitry 58 and to the REM sleep indicating circuit  
15 60.

With respect to the reset circuitry 58, whenever a signal is received from either the event counter 54 or the timing circuit 62, the event counter 54 and the timing circuit 62 will be reset. Thus, as can be seen,  
20 whenever the event counter 54 counts a predetermined number of eye movements within the preselected time interval, a REM sleep state will be indicated. At the same time, both the timing circuit 62 and the event counter 54 will be reset so as to enable a  
25 redetermination as to the existence of the REM sleep state. Similarly, whenever the timing circuit 62 times the preselected time interval, both the event counter 54 and the timing circuit 62 will be reset so as to enable a redetermination of an existence of a REM sleep  
30 state. If the preselected time interval passes and the event counter 54 has not counted a sufficient number of eye movements, the signal transmitted from an output 64 of the timer 62 to the REM sleep state indicating circuit 60 will cause such circuit 60 to indicate the  
35 absence of an REM sleep state. The sleep state

indicating circuit 60 in the illustrated embodiment is a flip-flop with an REM indicating output 66 and a non-REM indicating output 68.

Also shown in Figure 4 is the optional use of a  
5 body movement sensor 70. The body movement sensor 70 may comprise any of a number of motion sensing switches. Upon sensing body movement, the body movement sensor emits a signal over path 72 to the event counter 54 to prevent counting of eye movements  
10 for a predetermined period of time. Simultaneously, a signal is emitted by the body movement sensor 70 over a path 74 to the indicating circuit 60 to cause the indicating circuit 60 to be reset to indicate, at the output 68, the absence of a REM sleep state.

15 The use of the optional body movement sensor 70 is important because there are many times when an REM sleep state appears to exist if only the movement of an eye is considered. However, if body movement is present, a true REM sleep state does not exist. Thus,  
20 by sensing body movement, false readings as to the existence of a REM sleep state are eliminated.

Another optional feature of the invention shown in Figure 4 is the use of a pulsing means 76 for the eye movement sensor 50. The pulsing means 76 may be used  
25 to pulse the infrared beam 32 of the eye movement sensor 50 and may also be used to synchronize the beam sensor with the pulsed beam. It is, of course, possible to apply pulsing to other types of sensors as well.

30 With reference now to Figure 5, a preferred embodiment of the invention will be described.

Shown in the schematic diagram of Figure 5 is the use of an IR eye movement sensor 10 described previously. As can be seen, an IR light emitting diode  
35 100 serves as the IR emitter 16, and phototransistor

102 serves as the IR receiver, 18. In the presence of eye movement, the amount of IR light reaching a phototransistor 102 will vary, as discussed above, and a signal output by the phototransistor 102 at an output 5 104 will vary accordingly.

A voltage follower 106 formed by an operational amplifier isolates the eye movement sensor 10 from loading effects in the circuitry of the detector as is well known in the art. A signal corresponding to the 10 signal at 104 is produced at an output 108.

An alternating current (AC) component of the signal at 108 is made available for external monitoring and/or processing at a lead 110 after appropriate shaping by circuitry 112 as is well known in the art. 15 A direct current (DC) component is made available at lead 111. An output of circuitry 112 is also used to drive an LED 113 to indicate the presence of eye movement.

An AC component of the signal at 108 is extracted 20 by a capacitor 114 and made available at lead 116. The signal on lead 116 is fed into an operational amplifier 118 which includes potentiometer 117 and variable resistor 119 to provide an adjustable baseline level and an adjustable gain, respectively. A signal output 25 by differential amplifier 118 is provided at lead 120.

The signal at lead 120 is then fed into a monostable multivibrator 122 made up of two NAND Schmitt trigger gates 124 and 126. Gates 124 and 126 are arranged in the cross-lead flip-flop configuration 30 as is known by those skilled in the art. Insertion of capacitor 123 and resistor 125 in cross-lead 121 causes the flip-flop to function as a monostable multivibrator. A negative going pulse at lead 120 causes the flip-flop to change state. However, the 35 resulting state is maintained for a finite time

determined by the values of capacitor 123 and resistor 125. Following the change in state (output low at lead 128, output at lead 121 high), capacitor 123 begins charging. As capacitor 123 charges, electrical  
5 potential at the junction between capacitor 123 and resistor 125, initially high, begins dropping. When this potential drops to the negative going threshold of the input of Schmitt trigger NAND gate 126, output at lead 128 returns to a high state. As a consequence,  
10 the output at lead 128 goes low for a specific period of time, regardless of the length of the negative going pulses received at lead 120 during the timing cycle. Thus, monostable multivibrator 122 conditions signals received at lead 120, lengthening pulses shorter than  
15 the specified period and shortening pulses longer than the specified period, providing such conditioned signal at output lead 128. Values of capacitor 123 and resistor 125 are chosen so as to provide a conditioned low signal at lead 128 approximately 1/10 second, in  
20 response to a negative going signal at lead 120. A switch 130 is included and may be closed to manually cause the monostable multivibrator 122 to produce a conditioned low pulse at lead 128. Resistor 129 which provides for one cross-lead connection, prevents  
25 loading of the output at lead 128 when switch 130 is closed.

The signal at the lead 128 is inverted and buffered in a gate, such as NAND gate 127, and transmitted to an LED 129 which serves as a visual  
30 indication of the presence of a signal on the output 128 of monostable multivibrator 122.

The signal at the output 128 is also coupled to an input 132 of the event counter circuit 54 which includes an integrated circuit (IC) counter 134. The  
35 IC 134 is readily available off-the-shelf and is

designated generically as a CD4520 counter IC. The IC contains two 4-stage binary counters. The counters are cascaded in the present application by connecting the "Q4" output of the first counter to the "ENABLE" pin of the second counter (pin function names are those of the manufacturer).

The counter IC 134 maintains a cumulative count of each time the signal at the lead 132 goes low. As the cumulative count advances, corresponding output pins of the counter 134 go high. These output pins are connected through diodes to program switches 140. Until high signals appear at output pins connected to all closed ones of program switches 140 (these are preset to a given count which is believed to be indicative of a REM sleep state), lead 142 is held low. When high signals appear all output pins connected to closed ones of program switches 140, lead 142 is brought high by pull-up resistor 141 as is known in the art.

For purposes of clarity, only two of the switches 140 are shown, although eight such switches and diode combinations are provided. In one embodiment, the switches 140 appear at output leads 3, 4, 5, 6, 11, 12, 13, 14, as so designated by the manufacturer, of the CD4520 IC 134. The number of eye movements required to produce a signal on the lead 142 is selected by setting the switches 140 to the corresponding binary number.

The signal at the lead 142 is coupled to an input 144 of a NOR gate 146. A signal output from the NOR gate 146 at lead 148 is normally high unless a high signal is present at either the input 144 or an input 150.

When output 148 has been high for a sufficiently long time, capacitor 149 is fully charged through resistor 147. In this fully charged state, capacitor

149 presents a high signal to both inputs of NAND Schmitt trigger gate 152, which acts as an inverter to provide a low output signal. When the counter 134 receives a sufficient number of low pulses at the lead 132, a high signal appears at the lead 142 and a low signal appears at the lead 148.

When the low signal appears at lead 148, capacitor 149 begins discharging through resistor 147. When the voltage across capacitor 149 drops below the negative going threshold of one or both of the inputs of NAND Schmitt trigger gate 152, the output of this gate goes high. This high signal is used to reset the cumulative count in the counter IC 134 to zero.

The signal at the lead 148 is inverted by the NAND gate 152 and the inverted signal at lead 153 is used to reset the cumulative count in the counter IC 134 to zero. The combination of resistor 147, capacitor 149, and NAND Schmitt trigger gate 152 serve the purpose of producing a time delay in the reset signal, allowing the signal on lead 142 to remain high for sufficient time to permit the effects of the high signal on lead 142 to be propagated through other circuitry.

In addition to input 144, the signal output at the lead 142 of the event counter 54 is input into an inverter 156. An output signal of the inverter 156 is available at lead 158 and is fed into an input of monostable multivibrator 160 made of NAND Schmitt trigger gates 162 and 164, and capacitor 163 and resistor 165, arranged and functioning in a manner identical to monostable multivibrator 122 described above. Monostable multivibrator 160 provides a high signal pulse at lead 166 each time lead 142 goes high (and lead 158 goes low).

The signal at the lead 166 is coupled through resistor 167 to an input of a flip-flop 168 which is

made of two NOR gates 170 and 172, inter-connected as is known in the art. A signal output from the flip-flop 168 at a lead 174 is used to indicate the ascertainment of a REM sleep state, such as by a REM indicator 176. The signal at the output lead 174 goes high (REM sleep detected) whenever the signal at the lead 166 goes high (REM sleep detected) unless a signal at an input lead 178 goes high, i.e., whenever a preselected time interval has expired or when body movement has been sensed as will be explained below. Switches 180 and 182 are provided to allow one to manually set the inputs 169 and 178, respectively, to a high state, in order to manually change the state of the flip-flop for testing purposes.

Resistors 167 and 181 prevent shorting of the outputs of gates 162 and 210, respectively, when switches 180 or 182, respectively, are closed. The flip-flop 168 provides the final REM sleep-no REM indicated decision.

Depending on the various input states to the flip-flop 168, some previously described and others to be described shortly, the flip-flop 168 will react by changing its output signals at the REM indicating output 174 and a non-REM indicating output 184. These outputs 174 and 184 can be used to drive a variety of devices, such as displays or alarms (not shown). The flip-flop 168 will continuously indicate either a REM sleep state or non-REM state, through non-REM indicator 186, and REM indicator 176 until a change in state is determined.

The devices which may make use of the signals at the outputs 174 and 184 are almost limitless. As an example, the signals at the outputs 174 and 184 may be used to turn on tape recorders and an alarm to allow a sleeper to awake and record a dream. Alternatively,



the signals may be used to turn on indicator lights or audio or other indicators to alert the sleeper or an observer of REM sleep status or to influence the content of sleeper's dreams.

5       A simple count of eye movement is generally not enough to positively determine the presence of a REM sleep state. REM sleep is characterized by a large number of eye movements within a short time interval, e.g., one minute. Thus, to detect REM sleep, the  
10 arrangement of Figure 5 also includes a provision for measuring the passage of time and determining the number of eye movements in a predetermined interval.

As can be seen in Figure 5, a timing circuit 188 is provided which includes a time base generator  
15 circuit 190 and a counter circuit 192. The time base circuit 190 is well known in the art. A Schmidt trigger 194, in conjunction with capacitor 199 and variable resistor 198, acts as an oscillator and preferably produces a low pulse on an output 196 at  
20 every second. Alternate time base frequencies may be used by adjusting variable resistor 198. Other time base means may be provided instead, including crystal controlled oscillators and the like.

The pulsed timing signal at the output 196 is fed  
25 into an event counter 192 which counts the pulsed signal. The event counter 192 may be formed by the same type of circuit as the event counter 54, and so functions similarly. An output signal at lead 202 will go high whenever a cumulative count in the event  
30 counter 200 reaches a value programmed via switches 204.

The signal at the output lead 202 is fed into the input 150 of the reset NOR gate 146. As described earlier, when the signal at the input 150 goes high  
35 (indicating a preselected time interval has elapsed),

th signal at the point 148 goes low. The signal at the point 148 is inverted and time-delayed by the NAND Schmitt trigger 152 in conjunction with resistor 147 and capacitor 149, as previously described. The  
5 inverted signal at the lead 153 is then used to reset the event counter 134 and the time counter 200 to zero for a subsequent redetermination of the presence or absence of REM sleep.

The signal output at 202 is also fed into a NAND  
10 inverter 206 to produce an inverted signal at lead 208 which is in turn input into the NAND gate 210. A signal from output lead 212 of the NAND gate 210 is low only when the signal at the lead 202 is low (indicating that the preselected time interval has not passed) and  
15 a signal on lead 214 is high (indicating that a body movement has not been detected, as will be described later).

The signal at the lead 212 is fed through resistor 181 into the input 178 of the flip-flop 168. When the  
20 signal at the input 178 goes high (indicating that the time interval has elapsed), the output signal at the REM indicating output 174 will go low (no REM sleep detected). At the same time, the signal at the non-REM indicating output 184 goes high to indicate that no REM  
25 sleep was detected.

LED 193 with resistor 192 and inverting NAND gate 191 provides a means of visually indicating the state of flip-flop 168.

Also included in the arrangement shown in Figure 5  
30 is circuitry for inhibiting possible false readings of REM sleep state existence by sensing the sleeper's movements. It has been determined that persons do not generally make large motor movements when in an REM sleep state.

A motion sensing switch 216 is provided, as is shown in Figure 5. Such a switch may be of any type, e.g., a pressure sensitive switch, piezoelectric switch, a mercury switch, a vibration sensitive switch, etc., so long as it adequately senses large motor body movement and emits a corresponding signal.

The body motion sensing switch 216 is connected between a power supply (not shown) and an input 218 of a monostable multivibrator 220, so that upon opening of the switch 216 (body movement sensed), a low pulse signal through pull-down resistor 215 will be present at the input 218. The low pulse signal from the switch 216 is lengthened by the pulse lengthener monostable multivibrator 220 so that a low pulse of specific length is made available at lead 222. Monostable multivibrator 220 functions in a manner identical to the functioning of monostable multivibrator 122, which was described previously.

The signal from the monostable multivibrator 220 at lead 222 is fed into the NAND gate 210 over the lead 214 and is subject to a logic NAND function with the inverted output on the lead 208 of the timing circuit counter 200. The resulting output signal at the lead 212 is then fed into the flip-flop 168 which makes the final REM-no REM decision, as discussed previously. Thus, when body motion is sensed, the resulting low pulse signal in lead 214 forces a high pulse signal at output 212 of NAND gate 210 and consequently to input 178 of flip-flop 168. The outputs of flip-flop 168 then indicate the absence of a REM state.

Low pulse signals from output 222 of monostable multivibrator 220 also activate a timing cycle in timer circuit 229. Timer circuit 229 functions as follows:

In the steady state (when no low pulses have been received for some period of time), output at lead 222

is a steady high. Capacitor 228 is fully charged through resistor 226 connected to the positive voltage supply (not shown), thus presenting a high input through lead 227 to one input of NAND Schmitt trigger gate 126. This high input enables gate 126 and permits it to function as part of monostable multivibrator 122 as described above.

When a low pulse appears at output 222 of monostable multivibrator 220, capacitor 228 is quickly discharged through resistor 224 and forward-biased switching diode 223. The values of resistors 219 and 224 and capacitors 217 and 228 are chosen so that the width of the low pulse at output 222 is of sufficient length to adequately discharge capacitor 228 during the duration of the pulse. Capacitor 228 is adequately discharged when the voltage appearing in lead 227 is below the negative going threshold of the input of Schmitt trigger NAND gate 126. Upon termination of the low pulse at output 222 of monostable multivibrator 220, output 222 returns to a high state. Because the voltage at lead 227 is substantially lower than the high signal at output 222, diode 223 is reverse biased and no current flows through diode 223 or resistor 224. However, capacitor 228 begins re-charging through resistor 226, which is connected to the positive supply voltage (not shown). Resistor 226 is chosen to have a value substantially larger than resistor 224. As a consequence, the re-charging of capacitor 228 will be correspondingly longer than its discharge through resistor 224 and diode 223. This re-charging constitutes a timing cycle which continues until the voltage at lead 227 reaches the positive going threshold of the input of Schmitt trigger NAND gate 126. Until this timing cycle is completed, the voltage in lead 227 is seen as an effective low signal by

Schmitt trigger NAND gate 126. This effective low signal forces output 128 of monostable multivibrator 122 to maintain a high state for the duration of the aforementioned timing cycle, regardless of other  
5 inputs. Thus, for the duration of the timing cycle, monostable multivibrator 122 is disabled from transmitting eye movement signals to counting circuit 54.

Large body movements may result in shifts of  
10 position of eye movement sensors. This may result in artifactual eye movement signals, which are actually gross body movements. Thus, the disabling of monostable multivibrator 122 for a time period following body movements prevents the transmission of  
15 these artifactual signals to the counting circuit 54. It is, of course, also possible to provide no time delay following body movements, although time delays in a range of between one and 100 seconds are preferred.

The REM/non-REM indicating outputs of flip-flop  
20 186 may be used for a variety of purposes. For example, it may be desired to awaken a sleeper for purposes of obtaining a report of his REM dream content. One method for doing this would be to awaken the sleeper in REM sleep after a pre-programmed  
25 cumulative number of eye movements has occurred. Circuitry for accomplishing this purpose is shown in Figure 5 as REM counter 230.

Negative going pulses representing eye movements at output lead 128 of monostable multivibrator 122 are  
30 transmitted via lead 131 to the enable input (manufacturer's designation) of CD4520 integrated circuit 246. Counter integrated circuit 246 in conjunction with programming switches 244 and pull-up resistor 245 form an event counter 246 which functions  
35 in a manner identical to event counter 54. Positive

going reset pulses on lead 153 are transmitted via resistor 250 to input lead 252 of NAND gate 234. If a high signal is present on another input lead 233 of NAND gate 234, then positive going pulses on lead 252 are inverted to negative going pulses on lead 235. These negative going pulses are again inverted to positive pulses by NAND gate 238, connected with both inputs connected together to function as a simple inverter. Positive pulses output from inverter 238 are transmitted to reset inputs of counter IC 240.

Input lead 233 of NAND gate 234 is connected to "NREM" output 184 of flip-flop 168. When output 184 is low, indicating presence of a REM state, the low signal on input 233 of NAND gate 234 forces the output of gate 234 into a continuous high state and reset pulses appearing on input 252 are not transmitted through the gate. When output 184 is high, indicating presence of a non-REM state, reset pulses are transmitted (inverted) through gate 234.

When a REM state is present, event counter 54 is continually being reset each time it reaches the pre-programmed count set by switches 140. This is necessitated by the need for repeated testing for the presence or absence of a REM state. By contrast, event counter 246 is not reset during the REM state. Consequently, event counter 246 is able to count the cumulative number of eye movements occurring during the entire duration of the REM state. During the NREM state, event counter 246 is reset synchronously with resets of event counter 54.

Outputs 241 and 236 are provided for count pulse and reset pulse outputs to an external device. One possibly useful external device which could make use of these outputs would be an external counter, which counts and resets synchronously with event counter 246.

Such a counter may be of many types. One purpose for such a counter would be to provide a visual display of the eye movement count for research purposes. A monolithic counter module with a visual display  
5 suitable for such purposes is sold as "SUBCUB-1" by Red Lion Controls, Inc.

Switch 251 is connected between the positive voltage supply and lead 252 in order to provide a means of manually resetting counter 246 and an external  
10 counter, if used. Resistor 250 serves to prevent short circuiting of the output of gate 152 and resetting of counter 54 and 192 when switch 251 is closed.

When event counter 246 reaches the count pre-set by programming switches 244, output 243 is pulled high  
15 by pull-up resistor 245, connected to the positive voltage supply. Output 243 may be used to control another device 242, which may be a means for generating an alarm device for awakening the sleeper. With such an alarm device, the sleeper can be awakened from the  
20 REM sleep state after a specific number of eye movements, in order to obtain a report of dream content.

Another method for awakening a sleeper for a report of his REM sleep dream content would be to  
25 awaken the sleeper within a pre-programmed time following termination of the REM sleep stage. Figure 6 depicts a circuit, which, when connected with the circuit of Figure 5, will accomplish this end.

When a patient is producing a certain number of rapid eye movements within a certain period of time,  
30 the flip-flop 168 indicates a "REM state." "REM" output 174 is at a high state and "NREM" output (184) is at a low state.

Output 184 is presented to both inputs of NAND  
35 gate 260, connected to function as an inverter.

Inverter 260, thus presents a high signal to the input of differentiator circuit 262 (composed of a resistor, diode, and capacitor, as is known in the art).

When NREM output 184 goes to a high state, the  
5 differentiator circuit 262 presents a momentarily low signal to input 263 of set-reset flip-flop 268 composed of two NAND gates connected as is known in the art.

The low signal at input 263 causes flip-flop 268  
10 to change state, thus presenting an enabling high signal on lead 269 to NAND Schmitt trigger gate 270, which is connected as a gate astable oscillator as is known in the art. Once enabled, the oscillator formed by gate 270 sends timed negative going pulses to the enable (manufacturer's designation) input of counter IC  
15 272 (CD4520). Preferably, the values of capacitor 273 and resistor 271 are chosen so that oscillator 270 presents pulses at a rate of one per second.

The momentarily low signal from differentiator 262 is also presented to NAND gate 274, connected as an  
20 inverter. Inverter 274 converts the momentarily low signal to a momentarily high signal which is presented to the reset inputs of CD4520 counter IC 272. This reset pulse ensures that each counting cycle of counter 272 is initialized with a count of zero. The time  
25 counter 272 utilizes programming switches 276 in a manner identical to counters 54 and 192, described previously.

When the count on counter 272 reaches the pre-programmed setting on switches 276, lead 278 is pulled  
30 high through pull-up resistor 279. The high signal on lead 278 is inverted by NAND gate 280 connected as an inverter. Thus, inverter 280 presents a low signal to differentiator circuit 282 and lead 314. When the input to differentiator 282 initially goes low, the  
35 differentiator 282 transmits a momentary low pulse to



flip-flop 285, composed of two NAND gates connected as is known in the art. This slow pulse changes the state of the flip-flop 285, causing an enabling high signal to appear at input 290 to NAND Schmitt trigger gate 285  
5 connected with a resistor 292 and a capacitor 294 to form a gated astable oscillator as is known in the art. The values of resistor 282 and capacitor 294 are chosen so that the frequency of square wave pulses produced by astable oscillator 300 is approximately 1 to 3 Hz.  
10 These pulses are input to inverting buffer alarm driver 302 composed of two NAND gates connected in parallel. With two NAND gates connected in parallel, sufficient current is provided to drive piezo-electric alarm buzzer 304. With each low pulse from astable  
15 oscillator 300, a high signal is provided by the output of alarm driver 302. This high signal turns on piezo-electric alarm buzzer 304 for the duration of the pulse. A number of suitable piezo-electric alarm buzzers are commercially available. One such suitable  
20 alarm is sold in the United States by the Radio Shack Division of Tandy Corporation as catalog number 273-060.

The sounding alarm can be turned off by closing switch 288, thus presenting a low signal to an input of  
25 NAND gate 286 of flip-flop 285. This low signal causes the flip-flop to change state. A low signal appears at lead 290, disabling astable oscillator 300 and forcing it to a resting high output state. This high signal is inverted by alarm driver 302 to a low (zero voltage)  
30 signal and no current flows to piezo-electric alarm buzzer 304.

When counter 272 reaches the pre-programmed setting on switches 276, further counting is prevented by the previously mentioned low signal on lead 314.  
35 This low signal pulls input 308 of flip-flop 268 low

through switching diode 312. The low input on input 308 resets flip-flop 268, putting a disabling low signal on gating lead 269 of astable oscillator 270 and forcing said oscillator into its resting high output state. In the absence of low pulses from oscillator 270, counter 272 remains at the count pre-programmed on switches 276.

Similarly, lead 308 is also pulled low (disabling time-based oscillator 270 in the same manner) through diode 310, whenever there is a return to a low state on lead 184 (indicating a return to REM sleep).

NAND Schmidt trigger gates are used widely throughout the circuit of Figures 5 and 6. This simplifies construction and reduces the number of integrated circuit packages required. In many cases, however, the characteristics of a Schmidt trigger are not necessary to the functioning of a gate at a particular location. Also, both inputs of some NAND gates are tied together, for example, to form a NOT or inverter function. Such gates can, of course, be replaced by other elements.

In general, those gates involved in timing or oscillating functions should be Schmidt trigger gates, and are shown as such in Figures 5 and 6 by being marked with a hysteresis symbol.

The NAND Schmidt trigger gates of one exemplary embodiment are available as a type CD4093 integrated circuit, while those NAND gates not having the Schmidt trigger function are available as type CD4011 chips. Simple inverters can be used from CD4069 or CD4049 chips. All such chips are in CMOS technology. The counters are dual CMOS hexadecimal counters, type CD4520, with pins 3, 4, 5, 6, 11, 12, 13, and 14, as designated by the manufacturer, each tied to a series diode and switch combination. In all cases, both

counting sections of each CD4520 integrated circuit are chained to create a single 8 bit binary counter. This is accomplished by connecting the high bit output (pin 6) of the first counter section to the "enable" input (pin 10) of the second counter section. Negative going pulses to be counted are entered via the "enable" input (pin 2) of the first counter section. "Clock" inputs (pins 1 and 9) of the two counter sections are connected to ground.

10 Diodes used in differentiator circuits and with programming switches are commercially available as type 1N4148 switching diodes. Other types of diodes might also be used by one skilled in the art.

Thus, a REM sleep state detector has been  
15 described which is relatively simple and inexpensive to build, yet highly accurate. Moreover, provisions have been made to reduce false readings in the presence of body movement during sleep and to permit detection of various activities within the detector.

20 While a preferred embodiment has been described, modifications which fall within the scope and spirit of the invention may become apparent to those skilled in the art. It is intended that such modifications be covered as well by the attached claims.

**We Claim:**

1. An apparatus for detecting sleep states, comprising: means for detecting movement of an eye and for transmitting an eye movement signal in response thereto; and means for receiving and evaluating said eye movement signal including: timing means for timing a predetermined interval, counting means for counting eye movements indicated by said eye movement signal, and indicating means for indicating existence of a predetermined number of detected eye movements within a said predetermined interval.
2. An apparatus as set forth in Claim 1, further including reset means coupled to said counting means for resetting said counting means in response to a timing signal from said timing means upon elapse of said predetermined interval.
3. An apparatus as set forth in Claim 1, further comprising: reset means coupled to said timing means for resetting said timing means in response to receipt of a counting signal from said counting means indicating that a predetermined number of detected eye movements have been counted.
4. An apparatus as set forth in Claim 3, wherein said reset means resets said timing means and said counting means upon receipt of a timing signal from said timing means and upon receipt of a counting signal from said counting means.
5. An apparatus as set forth in Claim 4, wherein said timing means includes means for emitting time base signals at selectable time base intervals and means for counting said time base signals and emitting a timing signal upon reaching a selected count of said selected time base signals.

6. An apparatus as set forth in Claim 1, wherein said indicating means includes means for indicating the passage of said predetermined time interval without detection of said predetermined number of eye  
5 movements.

7. An apparatus as set forth in Claim 1, further comprising: means for sensing movement of a body; and means for inhibiting said indicating means upon sensing of body movement by said sensing means.

10 8. An apparatus as set forth in Claim 1, wherein said means for detecting movement of an eye comprises means for transmitting and receiving an infrared light beam adjacent an eye where movement of the eye results in detectable variations of the infrared light beam.

15 9. An apparatus as set forth in Claim 8, further comprising: means for pulsing said infrared light beam.

10 10. An apparatus as set forth in Claim 1, wherein said means for detecting movement of an eye comprises a piezoelectric sensor for application in a region of the eye.

11. An apparatus as set forth in Claim 1, wherein said means for detecting movement of an eye comprises an electro-ocular eye movement sensor.

25 12. An apparatus as set forth in Claim 1, further comprising: means for maintaining a cumulative count of indications by said indicating means.

30 13. A method for sensing sleep states, comprising the following steps: sensing movements of an eye; counting said sensed eye movements; emitting a count signal whenever a predetermined number of eye movements are sensed; timing a predetermined selected interval; emitting an interval signal upon elapse of said predetermined interval; and indicating existence of a

sl ep stat whenever said count signal occurs prior to  
th occurrenc of said interval signal.

14. A method as set forth in Claim 13, including  
a further step of: resetting said counted eye  
5 movements to zero after emission of said interval  
signal.

15. A method as set forth in Claim 13, including  
a further step of: restarting said timing step at zero  
after emission of said count signal.

10 16. A method as set forth in Claim 13, including  
further steps of: restarting said counting step at  
zero after emission of one of said count signal and  
said interval signal, and restarting said timing step  
at zero after emission of one of said count signal and  
15 said interval signal.

17. A method as set forth in Claim 13, further  
including steps of: sensing body movement; and  
inhibiting indication of said sleep state after said  
body movement is sensed.

20 18. A method as set forth in Claim 16, including  
a step of: terminating indication of existence of said  
sleep state whenever said interval signal is emitted  
prior to said count signal.

19. A method as set forth in Claim 13, wherein  
25 said step of sensing movements of an eye includes  
transmitting an infrared light beam across said eye.

20. An apparatus for detecting sleep states,  
comprising: an eye movement sensor which emits a  
movement signal upon sensing a movement of an eye; a  
30 counter coupled to said eye movement sensor which  
maintains a cumulative count of movements sensed by  
said eye movement sensor and which emits a count signal  
whenever said cumulative count reaches a selected  
number; a timer which times an interval and which emits  
35 a time signal whenever said interval has lapsed; and a

sleep state indicator circuit coupled to said counter and said timer which emits a signal whenever said count signal is received before said time signal.

21. An apparatus as set forth in Claim 20,  
5 including reset circuitry for resetting said cumulative count to zero and said timer to zero whenever one of said count signal and said time signal is emitted.

22. An apparatus as set forth in Claim 21,  
10 wherein said indicator circuit comprises a digital flip-flop arrangement to maintain said emitted signal until said time signal is received prior to said count signal.

23. An apparatus as set forth in Claim 22,  
15 including a sensor connected to sense body movement and to emit a signal upon sensing of body movement, said body movement sensor being coupled to said indicator circuit to inhibit emission of said output signal.

24. An apparatus as set forth in Claim 23,  
20 wherein said eye movement sensor comprises an emitter and receiver for an infrared beam transmitted across an eye.

25. An eye movement sensor, comprising: means for transmitting infrared light across an eye  
25 including: means for emitting an infrared light beam across an eye such that movement of said eye will cause said eye to protrude varyingly into said light beam thereby causing the amount of light transmitted in said light beam to vary, and means for receiving said light  
30 beam; and means for generating a signal in response to said varying amounts of light received by said means for receiving.

26. An eye movement sensor as set forth in Claim 25, including means for maintaining said means for emitting and means for receiving said light beam on opposite sides of an eye.

5        27. An eye movement sensor as set forth in Claim 25, wherein said means for emitting comprises an infrared light emitting diode, and said means for receiving comprises a phototransistor.



## AMENDED CLAIMS

[received by the International Bureau  
on 10 July 1989 (10.07.89)]

original claims 1, 8, 9, 19, 24-26 amended; new claims 28-37 added (7 pages)]

1. An apparatus for detecting sleep states,  
comprising: means for detecting movement of an eye  
and for transmitting an eye movement signal in  
5 response thereto; and means for receiving and  
evaluating said eye movement signal including: timing  
means for timing a predetermined interval, counting  
means for maintaining a cumulative count of eye  
movements indicated by said eye movement signal, and  
10 establishing a count signal whenever said cumulative  
count reaches a predetermined number, and  
indicating means for indicating existence of said  
predetermined number of detected eye movements within  
said predetermined interval.
- 15 2. An apparatus as set forth in Claim 1,  
further including reset means coupled to said counting  
means for resetting said counting means in response to  
a timing signal from said timing means upon elapse of  
said predetermined interval.
- 20 3. An apparatus as set forth in Claim 1,  
further comprising: reset means coupled to said  
timing means for resetting said timing means in  
response to receipt of a counting signal from said  
counting means indicating that a predetermined number  
25 of detected eye movements have been counted.
4. An apparatus as set forth in Claim 3,  
wherein said reset means resets said timing means and  
said counting means upon receipt of a timing signal  
from said timing means and upon receipt of a counting  
30 signal from said counting means.

**SUBSTITUTE SHEET**

5. An apparatus as set forth in Claim 4,  
wherein said timing means includes means for emitting  
time base signals at selectable time base intervals  
and means for counting said time base signals and  
5 emitting a timing signal upon reaching a selected  
count of said selected time base signals.

6. An apparatus as set forth in Claim 1,  
wherein said indicating means includes means for  
indicating the passage of said predetermined time  
10 interval without detection of said predetermined  
number of eye movements.

7. An apparatus as set forth in Claim 1,  
further comprising: means for sensing movement of a  
body; and means for inhibiting said indicating means  
15 upon sensing of body movement by said sensing means.

8. An apparatus as set forth in Claim 1,  
wherein said means for detecting movement of an eye  
comprises means for transmitting and receiving an  
electromagnetic beam adjacent an eye where movement of  
20 the eye results in detectable variations of the  
electromagnetic beam.

9. An apparatus as set forth in Claim 8,  
further comprising: means for pulsing said  
electromagnetic beam.

25 10. An apparatus as set forth in Claim 1,  
wherein said means for detecting movement of an eye  
comprises a piezoelectric sensor for application in a  
region of the eye.

11. An apparatus as set forth in Claim 1,  
30 wherein said means for detecting movement of an eye  
comprises an electro-ocular eye movement sensor.

12. An apparatus as set forth in Claim 1, further comprising: means for maintaining a cumulative count of indications by said indicating means.

5           13. A method for sensing sleep states, comprising the following steps: sensing movements of an eye; counting said sensed eye movements; emitting a count signal whenever a predetermined number of eye movements are sensed; timing a predetermined selected  
10 interval; emitting an interval signal upon elapse of said predetermined interval; and indicating existence of a sleep state whenever said count signal occurs prior to the occurrence of said interval signal.

15           14. A method as set forth in Claim 13, including a further step of: resetting said counted eye movements to zero after emission of said interval signal.

20           15. A method as set forth in Claim 13, including a further step of: restarting said timing step at zero after emission of said count signal.

25           16. A method as set forth in Claim 13, including further steps of: restarting said counting step at zero after emission of one of said count signal and said interval signal, and restarting said timing step at zero after emission of one of said count signal and said interval signal.

30           17. A method as set forth in Claim 13, further including steps of: sensing body movement; and inhibiting indication of said sleep state after body movement is sensed.

18. A method as set forth in Claim 16, including the step of: terminating indication of existence of said sleep state whenever said interval signal is emitted prior to said count signal.

5 19. A method as set forth in Claim 13, wherein said step of sensing movements of an eye includes transmitting an electromagnetic beam across said eye.

20. An apparatus for detecting sleep states, comprising: an eye movement sensor which emits a movement signal upon sensing a movement of an eye; a counter coupled to said eye movement sensor which maintains a cumulative count of movements sensed by said eye movement sensor and which emits a count signal whenever said cumulative count reaches a selected number; a timer which times an interval and which emits a time signal whenever said interval has elapsed; and a sleep state indicator circuit coupled to said counter and said timer which emits a signal whenever said count signal is received before said time signal.

10 15 20

21. An apparatus as set forth in Claim 20, including reset circuitry for resetting said cumulative count to zero and said timer to zero whenever one of said count signal and said time signal is emitted.

25

22. An apparatus as set forth in Claim 21, wherein said indicator circuit comprises a digital flip-flop arrangement to maintain said emitted signal until said time signal is received prior to said count signal.

30

23. An apparatus as set forth in Claim 22,  
including a sensor connected to sense body movement  
and to emit a signal upon sensing of body movement,  
said body movement sensor being coupled to said  
5 indicator circuit to inhibit emission of said output  
signal.

24. An apparatus as set forth in Claim 23,  
wherein said eye movement sensor comprises an emitter  
and receiver for an electromagnetic beam transmitted  
10 across an eye.

25. An eye movement sensor, comprising:  
means for transmitting an electromagnetic beam across  
an eye including: means for emitting an  
electromagnetic beam across an eye such that movement  
15 of said eye will cause said eye to protrude varyingly  
into said electromagnetic beam thereby causing the  
amount of electromagnetic energy transmitted in said  
electromagnetic beam to vary, and means for receiving  
said electromagnetic beam; and means for generating a  
20 signal in response to said varying amounts of  
electromagnetic energy received by said means for  
receiving.

26. An eye movement sensor as set forth in  
Claim 25, including means for maintaining said means  
25 for emitting and means for receiving said  
electromagnetic beam on opposite sides of an eye.

27. An eye movement sensor as set forth in  
Claim 25, wherein said means for emitting comprises an  
infrared light emitting diode, and said means for  
30 receiving comprises a phototransistor.

28. A method as set forth in Claim 18, further including the step of: awakening a sleeper within a predetermined interval following said step of terminating indication of existence of said sleep  
5 state.

29. An apparatus as set forth in Claim 6, further comprising: means for awakening a sleeper within a second predetermined interval following the passage of said predetermined time interval without  
10 detection of said predetermined number of eye movements.

30. An apparatus as set forth in Claim 27, wherein said means for awakening includes: a timer connected to emit an alarm initiation signal within  
15 said second predetermined interval; and an audible indicator connected to emit an audible signal upon receipt of said alarm initiation signal.

31. An apparatus as Claimed in Claim 20, further comprising: indicator means for emitting a  
20 sensory signal to be sensed by a sleeper.

32. An apparatus as Claimed in Claim 29, wherein said indicator means emits an audible sensory signal.

33. An apparatus as Claimed in Claim 29, wherein said indicator means emits a vibrating sensory  
25 signal.

34. An apparatus as Claimed in Claim 29, wherein said indicator means emits a visible sensory signal.

**SUBSTITUTE SHEET**

35. An apparatus as Claimed in Claim 29,  
wherein said indicator means is activated when said  
count signal is received before said time signal to  
indicate the existence of a predetermined sleep state.

5        36. An apparatus as Claimed in Claim 29,  
wherein said indicator means is activated when said  
time signal is received before said count signal to  
indicate the end of a predetermined sleep state.

10       37. An apparatus as Claimed in Claim 20,  
further comprising: means for recording being  
activated by said sleep state indicator circuit.

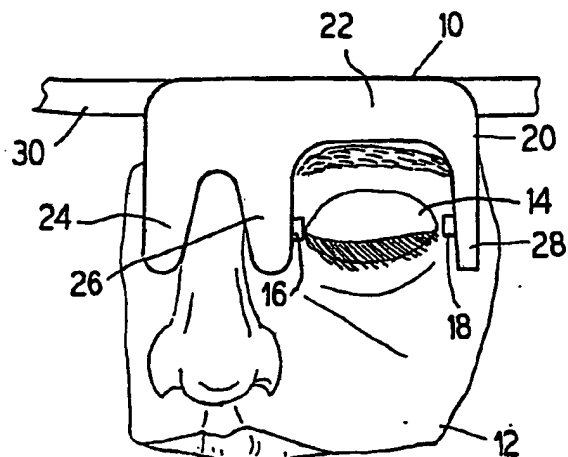


FIG. 1

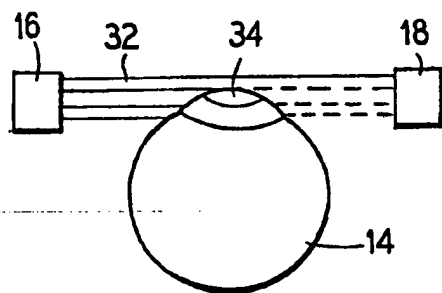


FIG. 2

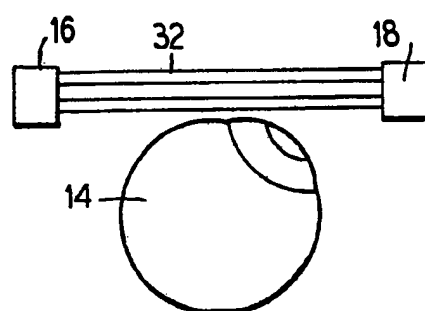


FIG. 3



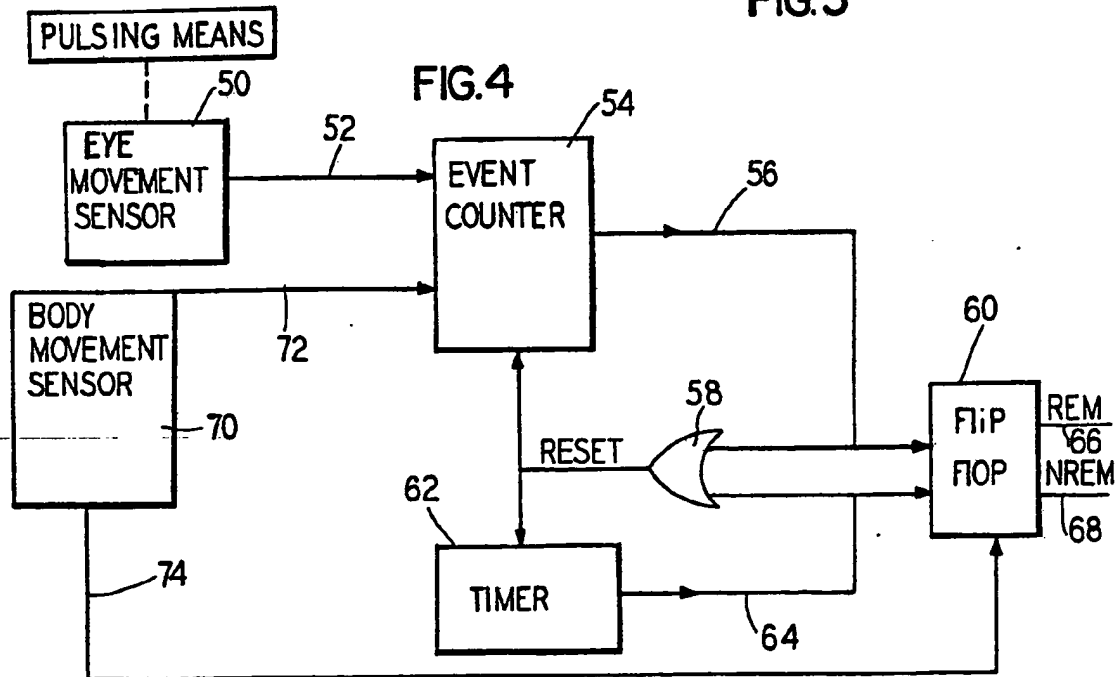




FIG. 5

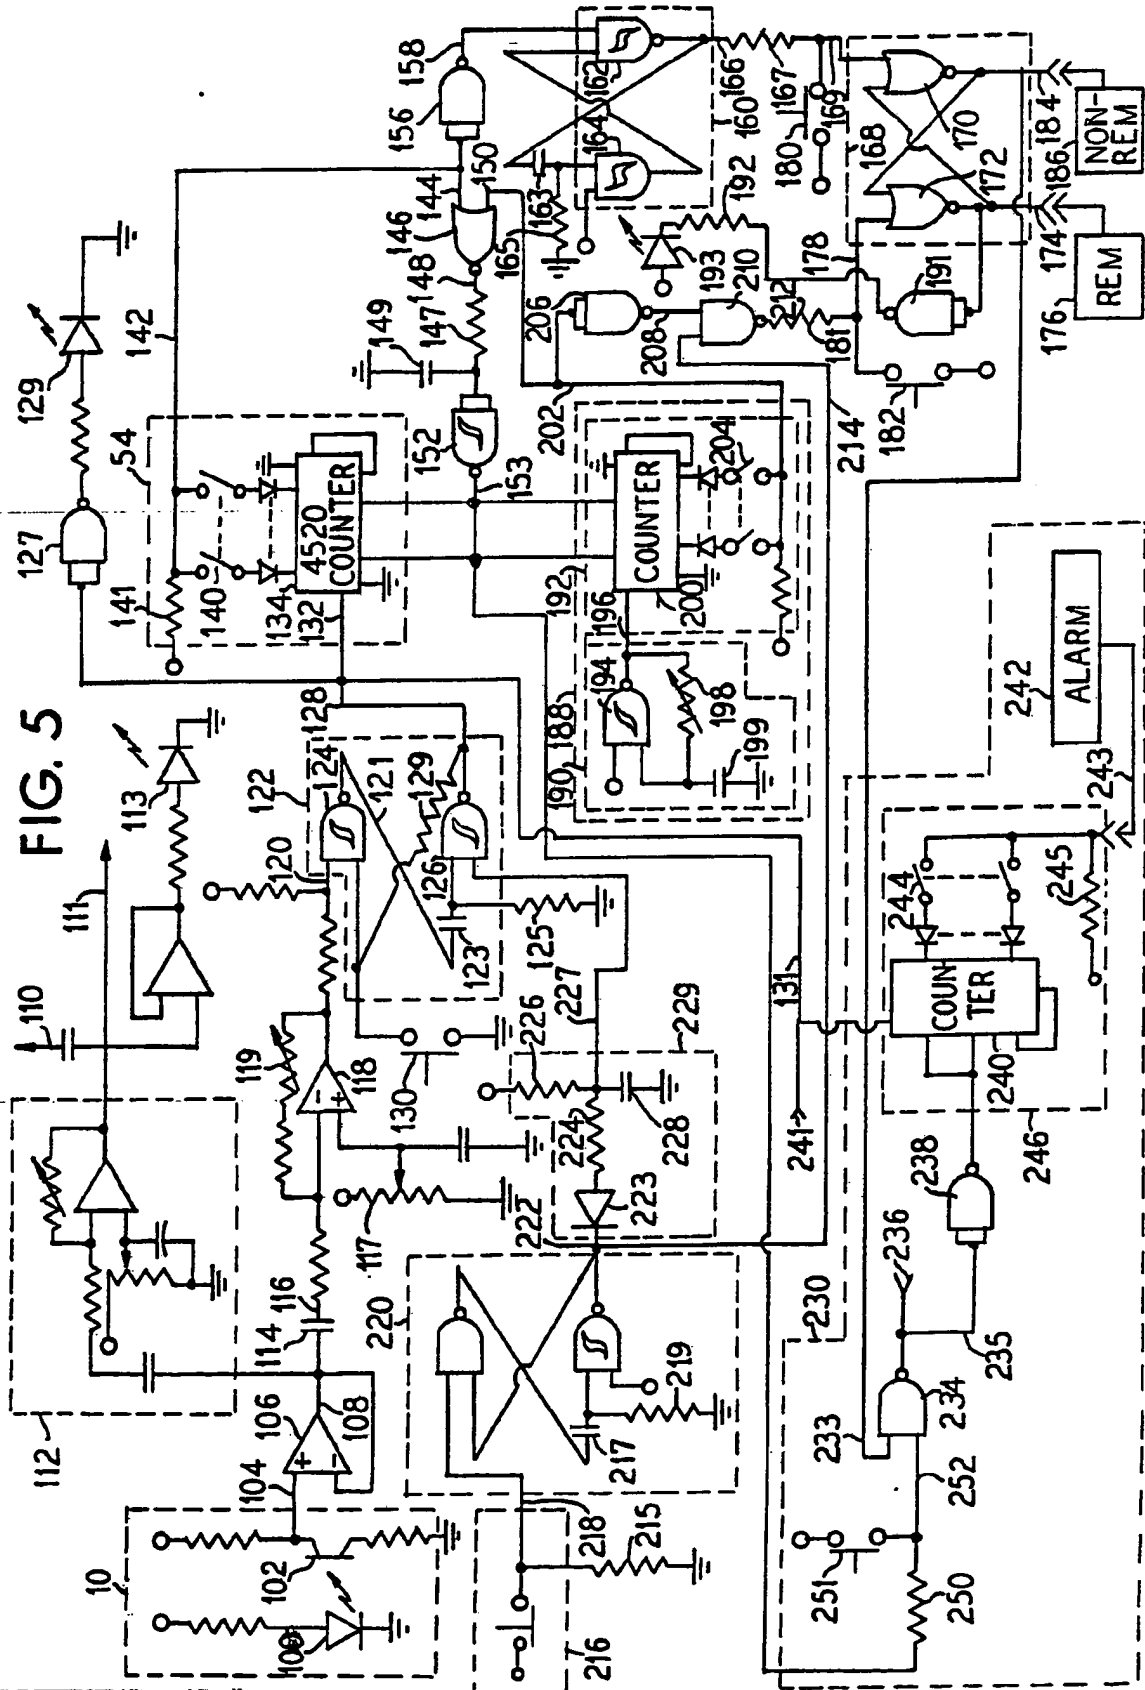

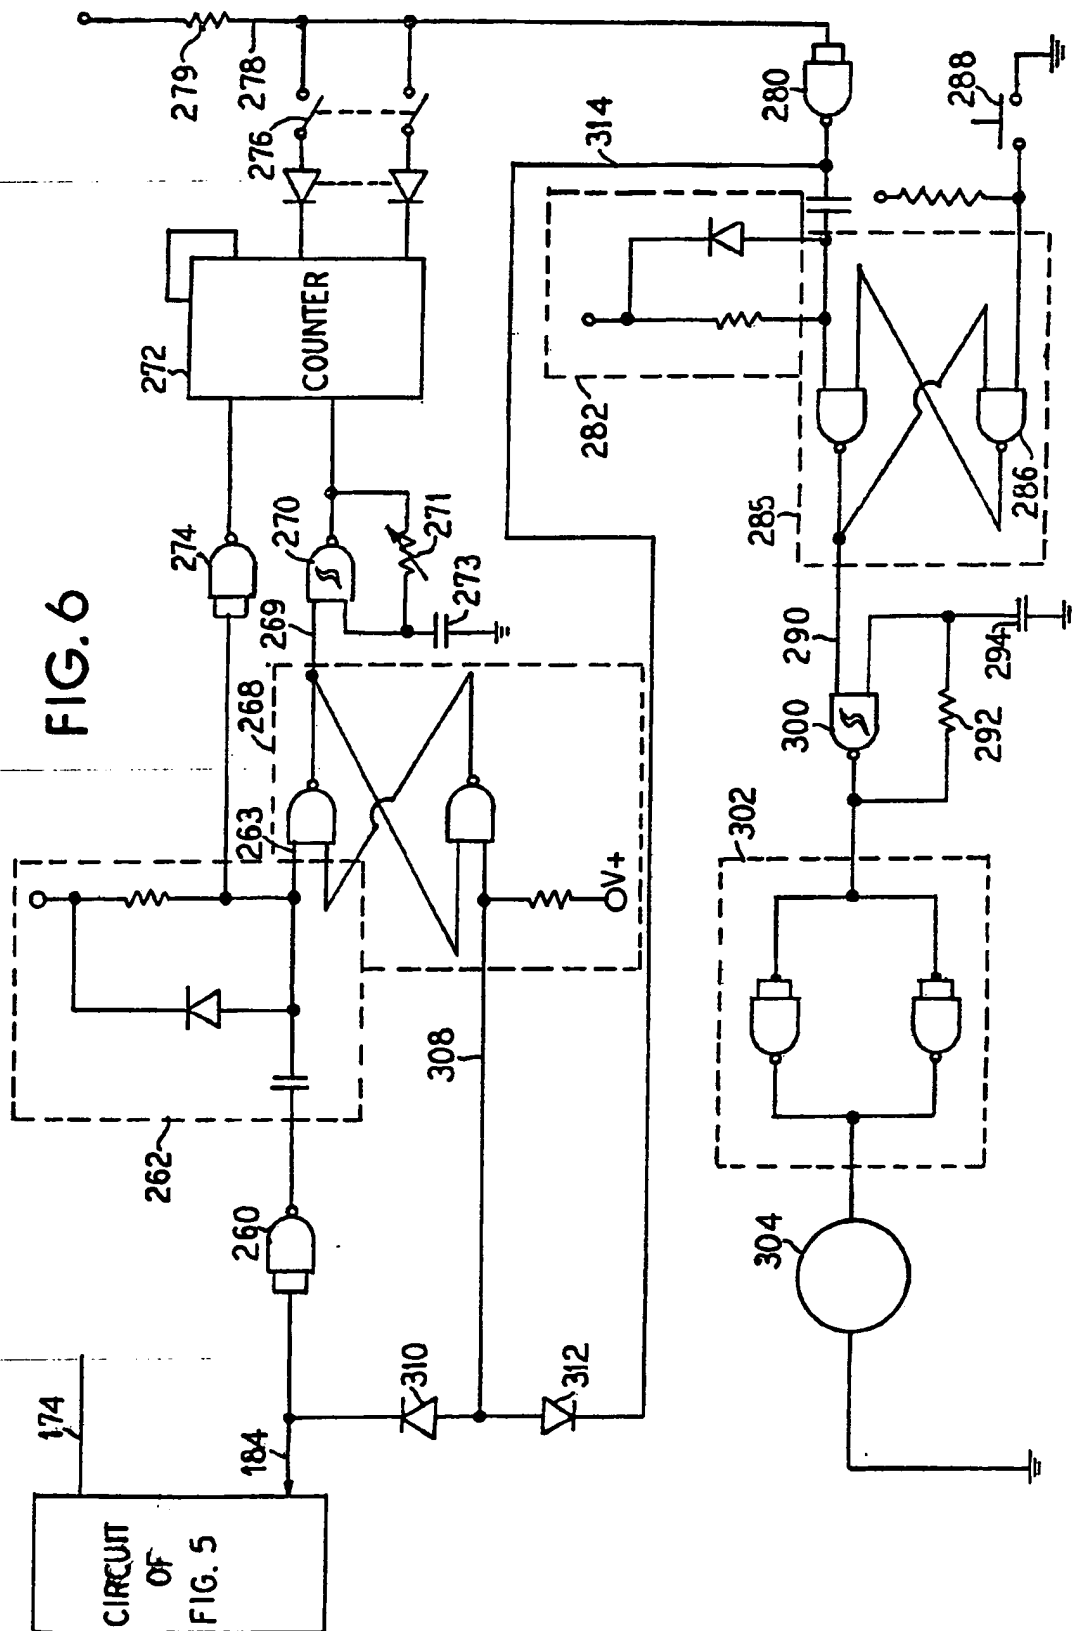

# INTERNATIONAL SEARCH REPORT

International Application No. **PCT/US88/02359**

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>6</sup> According to International Patent Classification (IPC) or to both National Classification and IPC <b>IPC (4); A61B 3/14</b> <b>US CL; 351/209,210</b>																	
<b>II. FIELDS SEARCHED</b> <div style="text-align: right; margin-right: 50px;">Minimum Documentation Searched <sup>7</sup></div> <table style="width: 100%; border: none;"> <tr> <td style="width: 25%; border: none; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="padding: 2px;">Classification System</th> <th style="padding: 2px;">Classification Symbols</th> </tr> <tr> <td style="text-align: center; padding: 5px;">U.S.</td> <td style="padding: 5px;">351/209,210,221 128/733</td> </tr> </table> </td> <td style="border: none; padding: 5px;">           Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>8</sup> </td> </tr> </table>			<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="padding: 2px;">Classification System</th> <th style="padding: 2px;">Classification Symbols</th> </tr> <tr> <td style="text-align: center; padding: 5px;">U.S.</td> <td style="padding: 5px;">351/209,210,221 128/733</td> </tr> </table>	Classification System	Classification Symbols	U.S.	351/209,210,221 128/733	Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>8</sup>									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="padding: 2px;">Classification System</th> <th style="padding: 2px;">Classification Symbols</th> </tr> <tr> <td style="text-align: center; padding: 5px;">U.S.</td> <td style="padding: 5px;">351/209,210,221 128/733</td> </tr> </table>	Classification System	Classification Symbols	U.S.	351/209,210,221 128/733	Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>8</sup>												
Classification System	Classification Symbols																
U.S.	351/209,210,221 128/733																
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT <sup>9</sup></b> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%; padding: 2px;">Category <sup>10</sup></th> <th style="width: 60%; padding: 2px;">Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup></th> <th style="width: 30%; padding: 2px;">Relevant to Claim No. <sup>13</sup></th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td style="vertical-align: top;"> <b>HELFAND ET AL, "REM/NREM Discrimination via Ocular and Limb Movement Monitoring: Correlation with Polygraphic Data, and Development of a REM State Algorithm.", May 1986</b>            See page 335, column 2 page 336, column 1         </td> <td style="vertical-align: top; text-align: center;">1, 7-11</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">           DE, A, 3,229,773 (KRAUS) 5 May 1983            See entire front page         </td> <td></td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">           US, A, 3,804,496 (CRANE ET AL) 16 April 1986            See column 5, lines 17-63         </td> <td></td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">           US, A, 4, 568,159 (BALDWIN) 4 February 1986            See Abstract and Column 1, lines 40-55         </td> <td></td> </tr> </tbody> </table>			Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>	X	<b>HELFAND ET AL, "REM/NREM Discrimination via Ocular and Limb Movement Monitoring: Correlation with Polygraphic Data, and Development of a REM State Algorithm.", May 1986</b> See page 335, column 2 page 336, column 1	1, 7-11	A	DE, A, 3,229,773 (KRAUS) 5 May 1983 See entire front page		A	US, A, 3,804,496 (CRANE ET AL) 16 April 1986 See column 5, lines 17-63		A	US, A, 4, 568,159 (BALDWIN) 4 February 1986 See Abstract and Column 1, lines 40-55	
Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>															
X	<b>HELFAND ET AL, "REM/NREM Discrimination via Ocular and Limb Movement Monitoring: Correlation with Polygraphic Data, and Development of a REM State Algorithm.", May 1986</b> See page 335, column 2 page 336, column 1	1, 7-11															
A	DE, A, 3,229,773 (KRAUS) 5 May 1983 See entire front page																
A	US, A, 3,804,496 (CRANE ET AL) 16 April 1986 See column 5, lines 17-63																
A	US, A, 4, 568,159 (BALDWIN) 4 February 1986 See Abstract and Column 1, lines 40-55																
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p><sup>14</sup> Special categories of cited documents: <sup>10</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"d" document member of the same patent family</p> </div> </div>																	
<b>IV. CERTIFICATION</b> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of the Actual Completion of the International Search</td> </tr> <tr> <td style="text-align: center; padding: 5px;">30 March 1989</td> </tr> </table> </td> <td style="width: 50%; border: none; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of Mailing of this International Search Report</td> </tr> <tr> <td style="text-align: center; padding: 5px;">04 MAY 1989</td> </tr> </table> </td> </tr> <tr> <td style="border: none; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">International Searching Authority</td> </tr> <tr> <td style="text-align: center; padding: 5px;">ISA/US</td> </tr> </table> </td> <td style="border: none; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Signature of Authorized Officer</td> </tr> <tr> <td style="text-align: center; padding: 5px;">             Paul M. Dzierzynski         </td> </tr> </table> </td> </tr> </table>			<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of the Actual Completion of the International Search</td> </tr> <tr> <td style="text-align: center; padding: 5px;">30 March 1989</td> </tr> </table>	Date of the Actual Completion of the International Search	30 March 1989	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of Mailing of this International Search Report</td> </tr> <tr> <td style="text-align: center; padding: 5px;">04 MAY 1989</td> </tr> </table>	Date of Mailing of this International Search Report	04 MAY 1989	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">International Searching Authority</td> </tr> <tr> <td style="text-align: center; padding: 5px;">ISA/US</td> </tr> </table>	International Searching Authority	ISA/US	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Signature of Authorized Officer</td> </tr> <tr> <td style="text-align: center; padding: 5px;">             Paul M. Dzierzynski         </td> </tr> </table>	Signature of Authorized Officer	 Paul M. Dzierzynski			
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of the Actual Completion of the International Search</td> </tr> <tr> <td style="text-align: center; padding: 5px;">30 March 1989</td> </tr> </table>	Date of the Actual Completion of the International Search	30 March 1989	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of Mailing of this International Search Report</td> </tr> <tr> <td style="text-align: center; padding: 5px;">04 MAY 1989</td> </tr> </table>	Date of Mailing of this International Search Report	04 MAY 1989												
Date of the Actual Completion of the International Search																	
30 March 1989																	
Date of Mailing of this International Search Report																	
04 MAY 1989																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">International Searching Authority</td> </tr> <tr> <td style="text-align: center; padding: 5px;">ISA/US</td> </tr> </table>	International Searching Authority	ISA/US	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Signature of Authorized Officer</td> </tr> <tr> <td style="text-align: center; padding: 5px;">             Paul M. Dzierzynski         </td> </tr> </table>	Signature of Authorized Officer	 Paul M. Dzierzynski												
International Searching Authority																	
ISA/US																	
Signature of Authorized Officer																	
 Paul M. Dzierzynski																	